


Function V30

Item number: 01.17.783

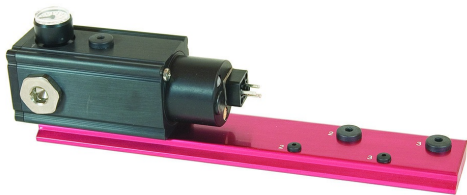

- Patented COAX® technology
- Substantially lower air consumption
- Modular design for flexible performance
- Compact and durable with no moving parts
- With its low energy consumption it can be controlled directly from the control system

Technical data

Description	Unit	Value
Material	-	Al. CuZn. HDPE. Nitrile (NBR). PA. PBT. POM. SS
Temperature, max.	°F	122
Temperature, min.	°F	32
Weight, max.	oz	368.75
Weight, min.	oz	306.25
Display	-	LED
Feed pressure, max.	psi	102
Safety classification	-	IP65
Noise level, max.	dBA	76
Noise level, min.	dBA	57
Current, consumption	mA	40
Ripple, max.	V _{rms}	1
Supply voltage, max.	VDC	28
Supply voltage, min.	VDC	14
Supply voltage, nominal	VDC	24

Dimensional drawings

