


Function ES Vacuum

Item number: 01.17.784

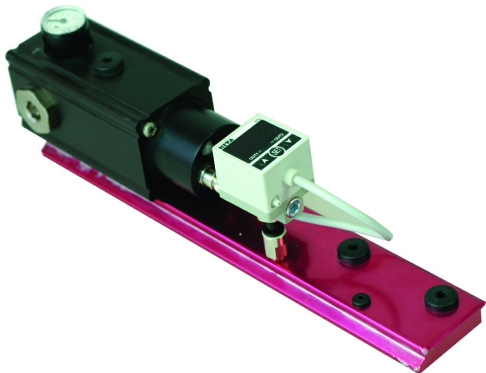

- Patented COAX® technology
- Substantially lower air consumption
- Modular design for flexible performance
- Compact and durable with no moving parts
- Saves energy when the vacuum requirement varies

Technical data

Description	Unit	Value
Material	-	Al. CuZn. HDPE. Nitrile (NBR). PA. PBT. PC. POM. SS
Temperature, max.	°F	122
Temperature, min.	°F	32
Weight, max.	oz	375
Weight, min.	oz	312.5
Display	-	LED
Feed pressure, max.	psi	102
Safety classification	-	IP40
Noise level, max.	dBA	76
Noise level, min.	dBA	57
Current, consumption	mA	60
Hysteresis	inHg	1-79
Signal range, max.	-inHg	28.054
Signal range, min.	-inHg	4.43
Ripple, max.	V _{rms}	1
Supply voltage, max.	VDC	28
Supply voltage, min.	VDC	14
Supply voltage, nominal	VDC	24

Dimensional drawings

