

Pump piPREMIUM200 Si32-3x8

Item number: 01.29.191



- COAX® patented technology
- Side mounted for low building heights
- High vacuum flow
- Compact size and low weight
- Low noise level
- Modular design


Technical data

Description	Unit	Value
Material	-	Al. Nitrile (NBR). PA. PP. SS
Temperature, max.	°F	140
Temperature, min.	°F	32
Weight, min.	oz	375
Feed pressure, max.	psi	102
Noise level, max.	dBA	77
Noise level, min.	dBA	69
Feed pressure, optimum, max.	psi	87
Feed pressure, optimum, min.	psi	58
Vacuum, max.	-inHg	22.15
Vacuum, min.	-kPa	203.18

Performance

Ejector specification	Feed pressure psi	Air consumption scfm	Vacuum flow (scfm) at different vacuum levels (-inHg)								Max vacuum -inHg
			0	2	5	8	11	14	17	20	
piPREMIUM200	58.015	21.19	84.76	49.16	32.21	20.34	13.56	6.78	1.7		≥17.72
piPREMIUM200	72.52	25.43	97.47	55.091	37.29	23.73	14.41	10.59	5.93	2.97	≥20.67
piPREMIUM200	87.023	29.66	101.71	59.33	44.073	28.82	15.26	10.17	8.48	5.93	≥22.15

Dimensional drawings

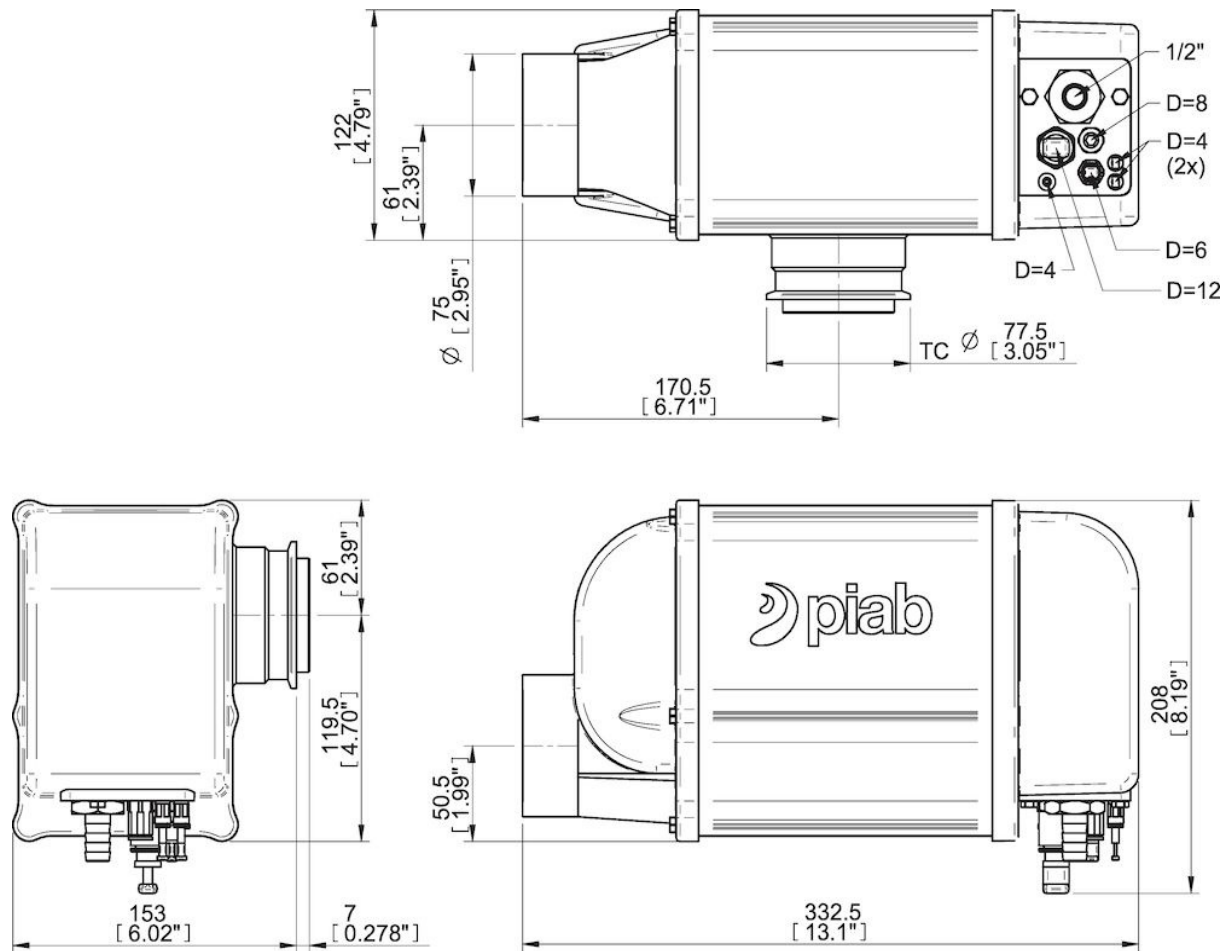

Values specified in this datasheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Compressed air quality, DIN ISO 8573-1 class 4.

Tolerance and accuracy:

- Feed pressure tolerance ±0.02 MPa [2.9 psi]
- Vacuum flow/evacuation time accuracy ±10%.

Accessories

- 01.04.490 | Regulator kit 1/2" 100-400
- 01.29.790 | Wall mounting kit pump piPREMIUM 100-400
- 02.01.649 | Maintenance kit piFLOW® pumps
- 01.17.851 | Clamp sealing Ø63.5x1.6 EPDM FDA, flange Ø77.5
- 01.17.852 | Clamp ring 63x1.65 / Ø77.5