


Pipeline emptying unit 76

Item number: 02.12.711

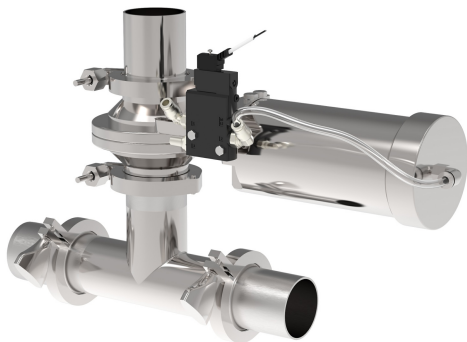


- Prevents material blockage at vertical lifts
- Electrically controlled
- Flexible location
- Electropolished at product contact surface:
Ra≤0.8
- ASTM 316L

Technical data

Description	Unit	Value
Material	-	ASTM 316L. Ethylene Propylene (EPDM)
Temperature, max.	°F	122
Temperature, min.	°F	23
Weight, min.	oz	553.75
Feed pressure, max.	psi	116
Feed pressure, min.	psi	7
Power	hp	0.0017
Diameter (Ø D1)	in	3
Diameter 2 (Ø D2)	in	3
Diameter 3 (Ø D3)	in	3.063
Height (H1)	in	11.54
Height (H2)	in	9.43
Length	in	12.52
Length 2 (L2)	in	17.1
Width (W)	in	4.87
Voltage, signal input	VDC	24

Dimensional drawings

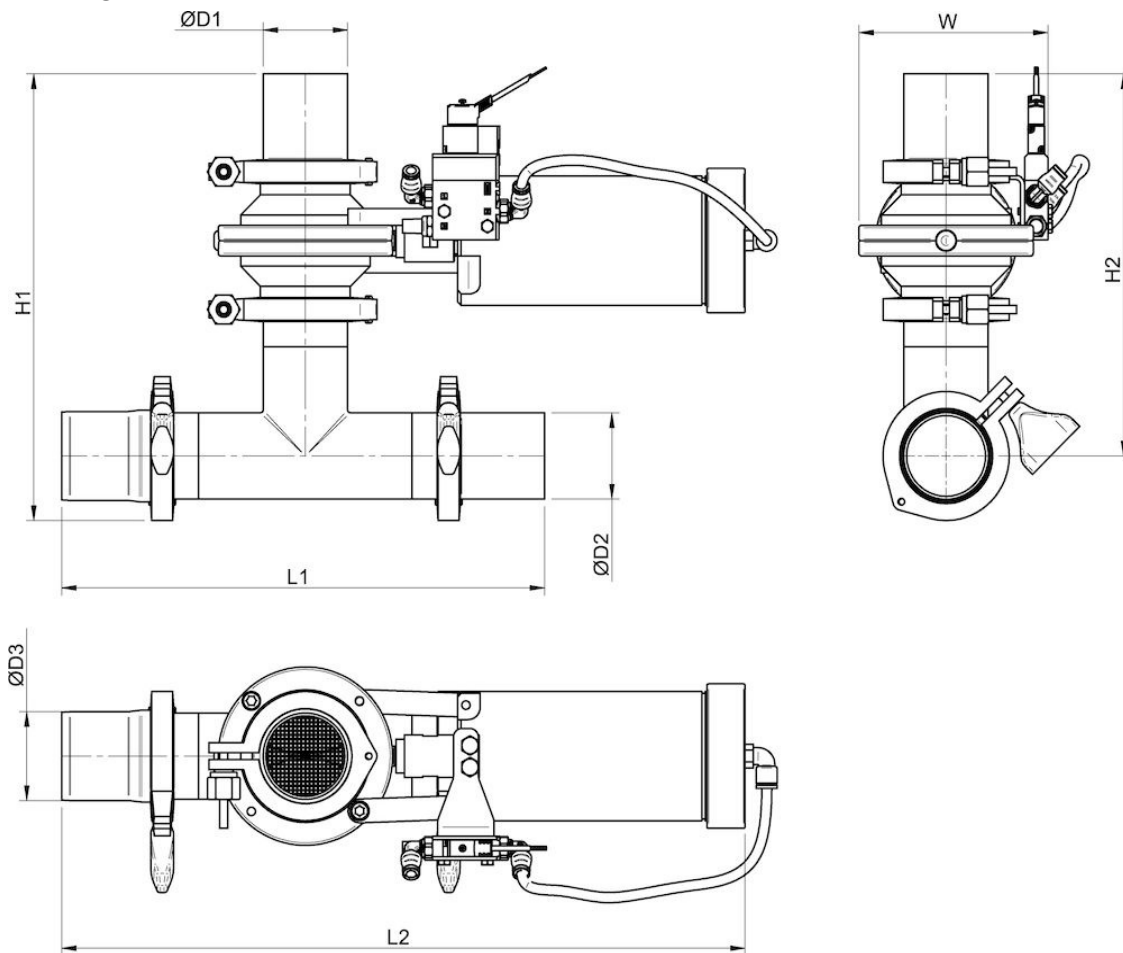

Accessories

- 02.43.815 | Air inlet filter 2" Standard
- 02.43.821 | Air inlet filter 2" Antistatic
- 02.43.877 | Clamp ferrule 76-3"w bushing in. G 2" SS

Spare parts

- 01.04.040 | Sanitary Gasket for 3" EPDM
- 01.04.044 | Quick Clamp 3" for TC
- 02.12.123 | Clamp sealing $\text{Ø}76.1 \times 1.65$ EPDM FDA Mesh10
- 02.12.244 | Clamp ring for flange $\text{Ø}91$ -ASTM 316 w nut