

Suction cup F75 HNBR with washer

Item number: F75.37.W



Technical data

Description	Unit	Value
Suction cup shape	-	Flat
Application	-	Dry sheet metal, Plastic injection molded parts, Glass handling, High/low temp cup, Mark Free
Suction cup design	-	Round
Characteristics	-	Dry sheet metal, Plastic injection molded parts, Glass handling, High/low temp cup , Mark free
Material	-	HNBR
Weight, min.	oz	0.81
Suction cup model	-	F
Volume	in ³	1.22
Height	in	0.51
Outer diameter, min.	in	3.031
Fitting size	-	None
Fitting option	-	Washer
Fitting style	-	None
Fitting type	-	None
Suction cup model	-	F75
Movement, vertical max.	in	0.12
Curve radius, min.	in	5.91

Performance - Lifting forces


F75	Vertical (lb)	Parallel (lb)
5.91 -inHg	17.98	13.49
17.72 -inHg	44.96	24.73
26.58 -inHg	60.70	31.47

Material	
Name	HNBR 50° Shore A
Color	Blue
Temperature, min. °F	-22.0
Temperature max. °F	284.0
Hardness °Shore A	50

Material resistance

Alcohol	Good
Concentrated acids	Fair
Ethanol	n/a
Hydrolysis	Good
Methanol	n/a
Oil	Excellent
Oxidation	Excellent
Gasoline	Excellent
Wear resistance	Excellent
Weather and ozone	Excellent

Dimensional drawings

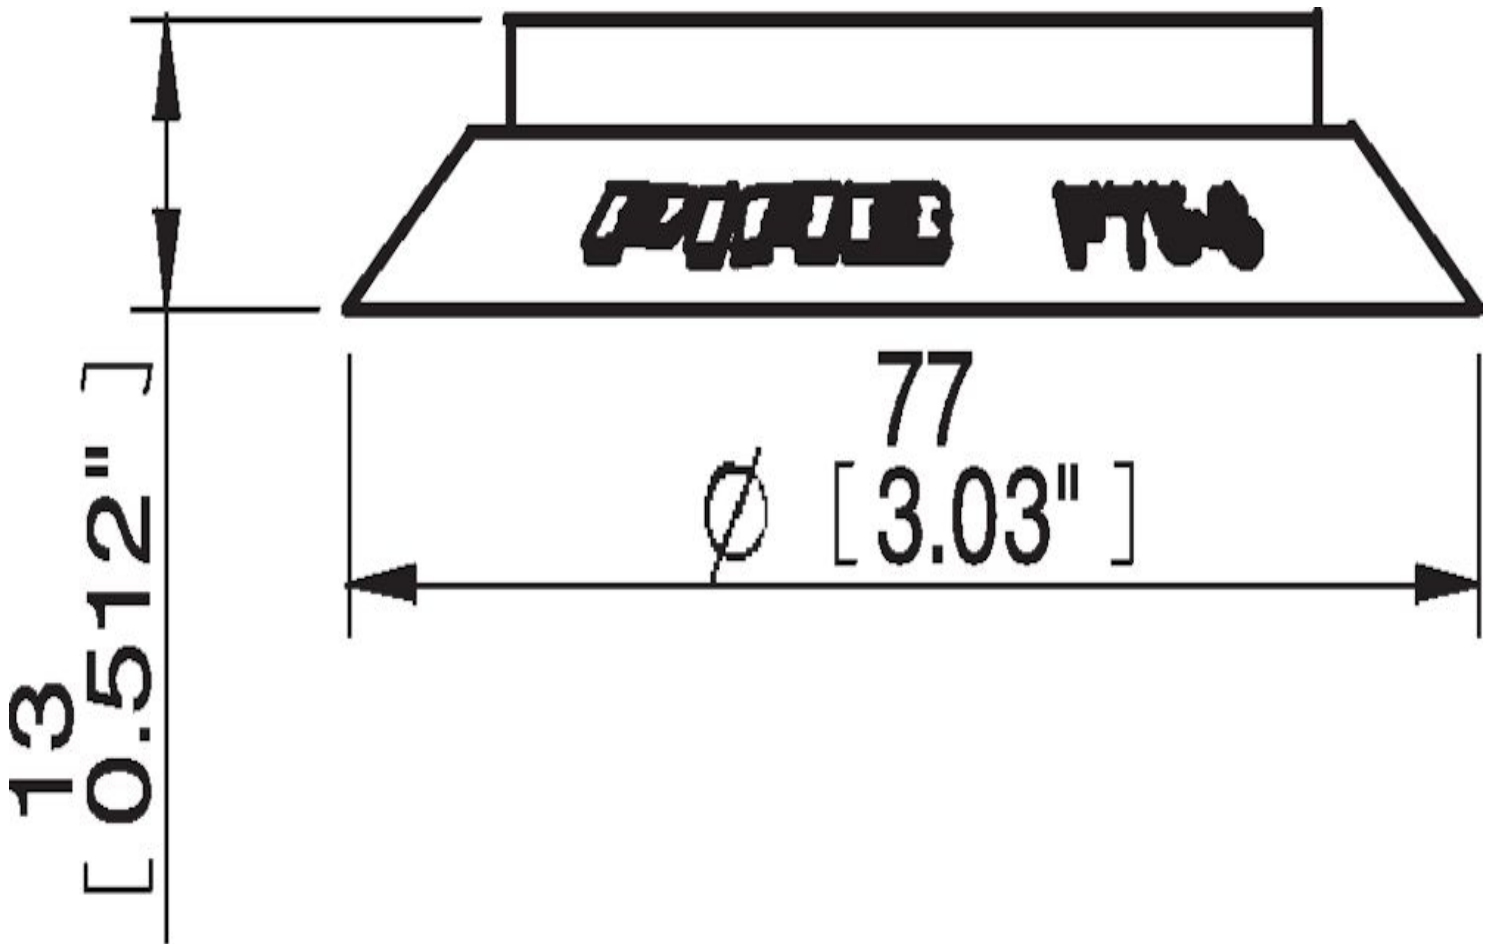

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

07NA | Fitting 75, 1/8" NPSF female, clamp ring with mesh filter

07ND | Fitting 75, G3/8" female, clamp ring with mesh filter

07VD | Fitting 75, G3/8" female, with cone valve

07NE | Fitting 75, 3/8" NPSF female, with mesh filter

07NF | Fitting 75, G1/2" female, clamp ring with mesh filter

07VF | Fitting 75, G1/2" female, with cone valve

07UA | Fitting 1/8" NPSF female AI, with mesh filter

07UD | Fitting G1/2" female AI, with mesh filter

07UH | Fitting 1/4" NPT female AI, with mesh filter & 10-32 addl. conn.