

Glass Fiber-Optic Cable

Through-Beam Mode

233-337-204E6

Part Number



- A broad range of applications are possible due to the modular system design
- Stock types deliverable at short notice

Technical Data


Optical Data


Fiber Bundle Diameter	2,3 mm
Opening Angle	68 °
Fiber	Step Index
Fiber Diameter	50 µm

Mechanical Data

Temperature Range	-25...180 °C
Bending Radius	60 mm
Fiber-Optic Length L	1 m
Jacket Material	Stainless steel, V2A (1.4301 / 304)
Material End Sleeve	Stainless steel, V2A (1.4305 / 303)
Light Emission	sidewise
Packaging unit	1 Piece

Glass fiber optic cables are very flexible and can be used in applications with less space. Especially in applications with hot environment the metal casing fiber optic cables are the answer.

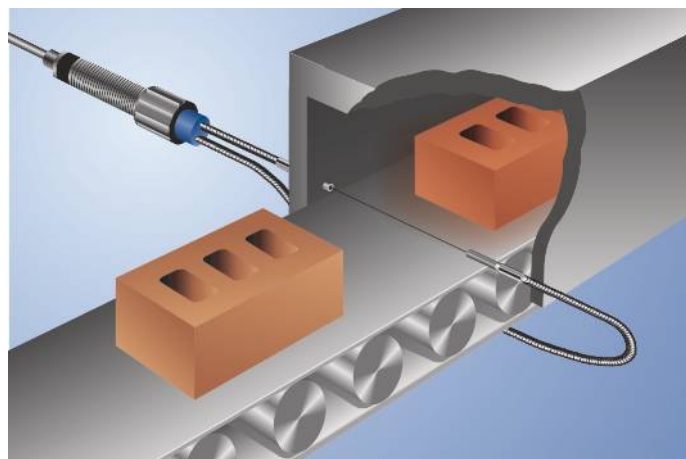

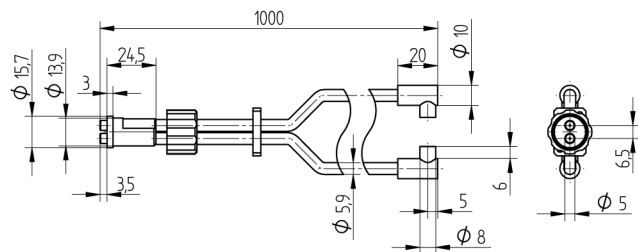

All dimensions in mm (1 mm = 0.03937 Inch)