

Fiber-Optic Cable Band for Fiber-Optic Cable Sensors

303-374-104

Part Number



- For measuring tasks
- Resistant to high temperature
- Variable light emitting slot

Glass fiber optic cable curtains function in accordance with the through-beam sensor principle. The fibers are arranged in a single line, thus creating a luminous row. If these fiber optic cable curtains are used in combination with an analog universal diffuse light sensor (UF22MV3, UF55MV3), the length of the slot corresponds to the analog range. If a universal diffuse light sensor with switching output is utilized (UF88PA), the switching point can be adjusted so that the output is switched when the light slot is obstructed to a defined extent.



Technical Data

Optical Data

Fiber Bundle Diameter	3 mm
Linearity	< 3 %
Range with Sensor Type UF55MV3	110...540 mm
Range with Sensor Type UF22MV3	40...200 mm
Range with Sensor Type U_55__	769 mm
Range with Sensor Type U_66__	1570 mm
Range with Sensor Type U_87__	1570 mm
Range with Sensor Type U_88__	1570 mm
Opening Angle	68 °
Fiber	Step Index
Fiber Diameter	50 µm
Fiber Distribution	statistical mixture


Mechanical Data

Temperature Range	-25...180 °C
Bending Radius	60 mm
Fiber-Optic Length L	1 m
Jacket Material	Stainless steel, V2A (1.4301 / 304)
Material End Sleeve	Aluminum
End Sleeve No.	74

Fiber-Optic Cable Adapter No.

001

303-374-104

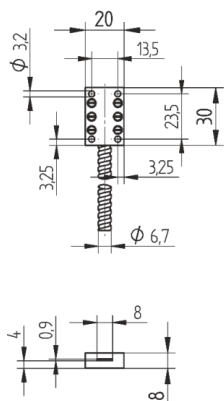

All dimensions in mm (1 mm = 0.03937 Inch)

