

Modular Ring Light

White infrared light, 130 mm

LMRX202

Part Number



- 4 sectors selectable
- Bicolor
- No external control required
- OverDrive
- Quick and easy replacement of accessories


The modular ring lights of the LMRX series are suitable for many illumination forms on a smaller visual field < Ø 130 mm. Based on the diffuse ring light, the way the light is scattered and directed at the target can be changed by adding various attachments. Each ring light has two light colors: Red/Cyan or White/IR. The lights can be operated in continuous mode or synchronized with the machine vision camera in strobe mode or strobe mode with increased intensity (OverDrive).

Technical Data

Optical Data	
Light Source	White-infrared light
Wavelength	860 nm
Beam angle	± 65 °
White light output	54000 Lux
Infrared light output	36 W/m²
Measuring point distance	100 mm
Environmental conditions	
Temperature Range	-10...40 °C
Storage temperature	-20...60 °C
Atmospheric humidity	< 80%, non-condensing
Electrical Data	
Supply Voltage	21,6...26,4 V DC
Power	12,96 W
Peak power	61,92 W
Current Consumption Continuous Mode (Ub = 24 V)	0,54 A
Current consumption flash mode OverDrive (operating voltage = 24 V)	2,58 A
Flash duration (max.)	2 ms
Duty cycle (max.)	< 0,1
Rise time	15 µs
Fall time	10 µs
Input signal	NPN
Input signal	PNP
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Dimming	0....10 V ± 100...30%
OverDrive	yes
Mechanical Data	
Housing Material	Aluminum, anodised
Housing Material	Plastic, ABS
Housing Material	Plastic, PMMA
Degree of Protection	IP65
UL Enclosure Type	1
Optic Cover	Plastic, PMMA
Connection	M12 × 1; 5-pin
Max. cable length	40 m
Camera aperture inner diameter	130 mm
Function	
Operating modes	Continuous, strobe overdrive
Connection Diagram No.	007
Suitable Mounting Technology No.	927

Complementary Products


Dome accessory ZMRG002
Low angle accessory ZMRG004
ZC4G003 connection cable
ZDCG004 connection cable
ZDCG005 connection cable

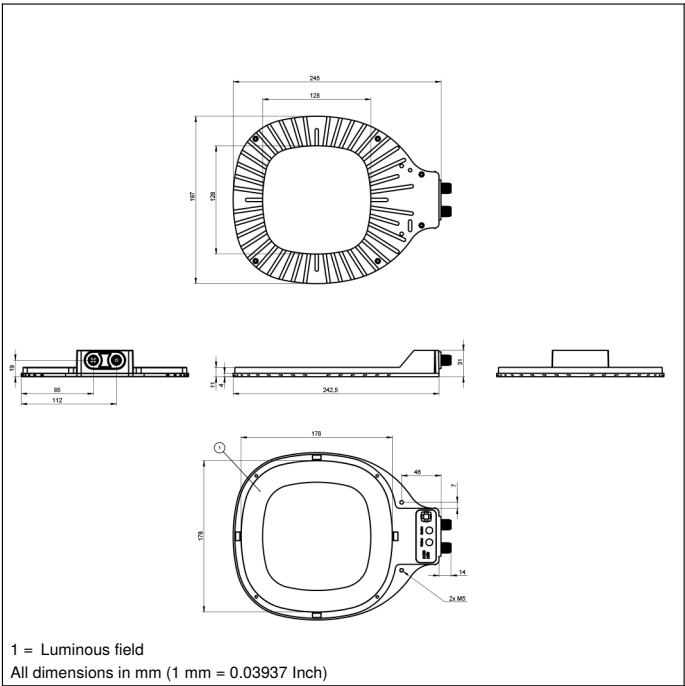


1 = Luminous field
All dimensions in mm (1 mm = 0.03937 Inch)

Ctrl. Panel

T18



0c = sector selection indicator
68 = Power LED
7b = Color Selection Button
8b = Sector Selection Button
9b = Strobe Mode Indicator

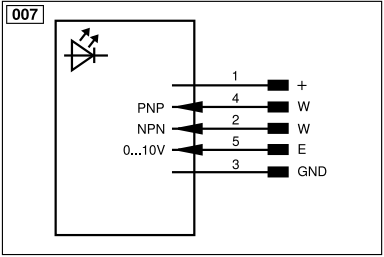

Legend					
+	Supply Voltage +	PT	Platinum measuring resistor	ENAR5422	Encoder A/Ā (TTL)
-	Supply Voltage 0 V	nc	Not connected	ENBR5422	Encoder B/Ĕ (TTL)
~	Supply Voltage (AC Voltage)	U	Test Input	ENa	Encoder A
A	Switching Output (NO)	Ū	Test Input inverted	ENb	Encoder B
Ā	Switching Output (NC)	W	Trigger Input	AMIN	Digital output MIN
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
Ū	Contamination/Error Output (NC)	O	Analog Output	AOK	Digital output OK
E	Input (analog or digital)	O-	Ground for the Analog Output	SY In	Synchronization In
T	Teach Input	BZ	Block Discharge	SY OUT	Synchronization OUT
R	Reset input	Amv	Valve Output	OLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization		
RDY	Ready	E+	Receiver-Line	BK	Black
GND	Ground	S+	Emitter-Line	BN	Brown
CL	Clock	⊕	Grounding	RD	Red
E/A	Output/Input programmable	SnR	Switching Distance Reduction	OG	Orange
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	YE	Yellow
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	GN	Green
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	BU	Blue
QSSD	Safety Output	La	Emitted Light disengageable	VT	Violet
Signal	Signal Output	Mag	Magnet activation	GY	Grey
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	WH	White
ENo RS422	Encoder 0-pulse 0/Ĕ (TTL)	EDM	Contact Monitoring	PK	Pink
				GNYE	Green/Yellow