

Light Curtain

Pick-to-Light

OLEB272C0102

Part Number



- 360° visible, two-color job display
- Error prevention during partial picking processes in shelves and storage locations
- Low mounting thanks to integrated reflector
- Rugged aluminium housing

Pick to light light curtains use the single-lens reflex principle. The necessary reflector is pre-installed on the rear of the housing and serves as a reflective surface for the neighboring light curtain, making installation easier. The integrated two-color light from the job display is visible from 360° and shows both correct and incorrect picks.



Technical Data

Optical Data

Range	2000 mm
Min. Distance to Reflector	100 mm
Measurement Field Height (MFH)	270 mm
Beam Distance	30 mm
Switching Hysteresis	< 15 %
Light Source	Red Light
Polarization Filter	yes
Service Life (T = +25 °C)	100000 h
Max. Ambient Light	10000 Lux
Opening Angle	2,5 °
Two-Lens Optic	yes

Electrical Data

Supply Voltage	10...30 V DC
Current Consumption (U _b = 24 V)	< 60 mA
Switching Frequency	60 Hz
Response Time	8 ms
Temperature Drift	< 10 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2,5 V
PNP Switching Output/Switching Current	200 mA
Residual Current Switching Output	< 50 µA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III

Mechanical Data

Setting Method	Teach-In
Housing Material	Aluminum
Degree of Protection	IP65
Connection	M12 × 1; 4-pin
Cable Length	250 mm
Housing Length (L)	396 mm
Reflector Length (RL)	324 mm

PNP NO/NC switchable

Connection Diagram No.

Control Panel No.

Suitable Connection Equipment No.


190

EB1

2


Complementary Products

PNP-NPN Converter BG2V1P-N-2M
Reflector Foil ZRDF10K01
Reflector ZRDE12B02

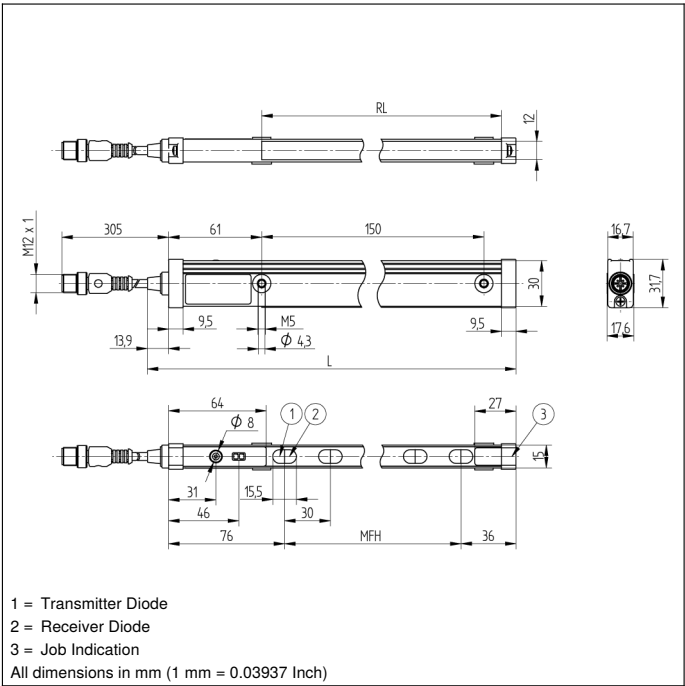


Ctrl. Panel

EB1



01 = Switching Status Indicator
06 = Teach Button
68 = supply voltage indicator

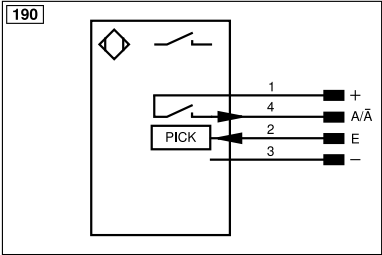

Legend						
+	Supply Voltage +	nc	Not connected	ENBRS422	Encoder B/B (TTL)	
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A	
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted	ENb	Encoder B	
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN	
Ä	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX	
V	Contamination/Error Output (NO)	O	Analog Output	AOK	Digital output OK	
Ȳ	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In	
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT	
T	Teach Input	Amv	Valve Output	OLT	Brightness output	
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance	
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved	
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757		
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black	
RDY	Ready	E+	Receiver-Line	BN	Brown	
GND	Ground	S+	Emitter-Line	RD	Red	
CL	Clock	±	Grounding	OG	Orange	
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow	
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	GN	Green	
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue	
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet	
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey	
Signal	Signal Output	Mag	Magnet activation	WH	White	
BL_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink	
ENo RS422	Encoder 0-pulse 0/Ü (TTL)	EDM	Contact Monitoring	GNYE	Green/Yellow	
PT	Platinum measuring resistor	ENARIS422	Encoder A/A (TTL)			

