

Safety Through-Beam Sensor

Emitter

SL2-00NS000H2



- Glass lenses
- Please note: According to Machinery Directive 2006/42/EC, this article may only be used as a spare part.
- Quick alignment through visible red light
- Test input

Optical Data

Range	0...20 m
Light Source	Red Light
Wavelength	640 nm
Opening Angle	± 4 °

Electrical Data

Sensor Type	Emitter
Supply Voltage	24 V DC
Current Consumption (U _b = 24 V)	< 20 mA
Temperature Range	-25...60 °C
Reverse Polarity Protection	yes
Protection Class	III

Mechanical Data

Housing Material	Plastic, PBT
Optic Cover	Glass
Full Encapsulation	yes
Degree of Protection	IP67
Connection	M12 × 1; 4-pin

Safety-relevant Data

ESPE Type (EN 61496)	2*
Safety Category (EN ISO 13849-1)	2
Performance Level (EN ISO 13849-1)	PL c
PFHD	3,16 × E-7 1/h *
Mission Time TM (EN ISO 13849-1)	20 a
MTTFd (EN ISO 13849-1)	381 a

Connection Diagram No.	769
Control Panel No.	K3 No3
Suitable Connection Equipment No.	2
Suitable Mounting Technology No.	350

Suitable Receiver

SL2-00NE000H2


* In combination with SS2-00VA000R2 or SS2-00VA000R3

These through-beam sensors are well suited for use in rough industrial environments. Together with the individual safety light barrier control unit SS2-00VA000Rx, access of machines can be safeguarded.




Complementary Products

Path-Folding Mirror Z2UG001
Safety Analysis Module SS2-00VA000R2
Safety Analysis Module SS2-00VA000R3
Set Protective Housing ZSN-NN-02
Software

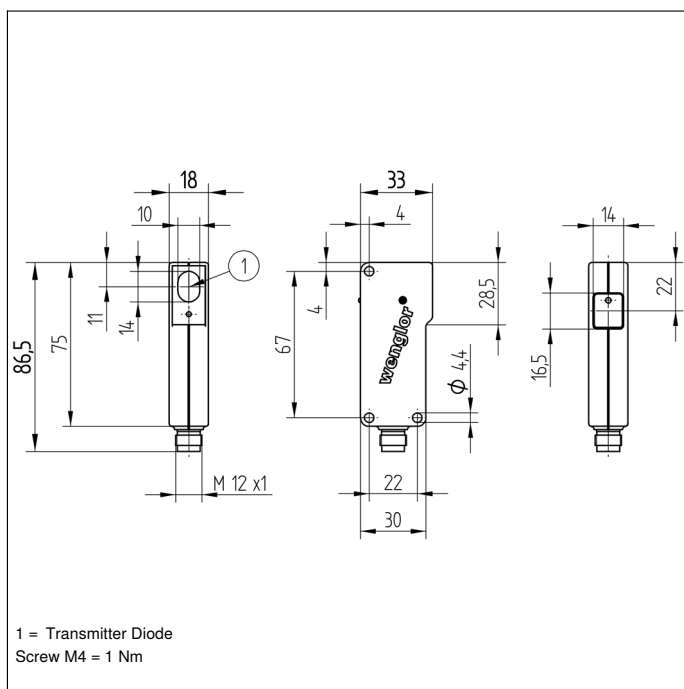

Ctrl. Panel

K3



Optic

No3



04 = Function Indicator