


Calibration Plate

270 × 360 mm, carbon

ZVZJ007

Part Number

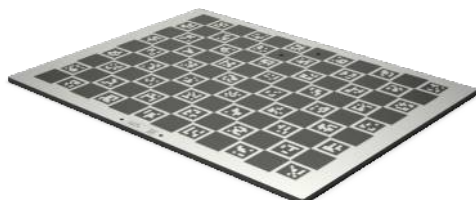

Technical Data

Optical Data

Accuracy total	± 40 μm
Accuracy per element	± 10 μm

Mechanical Data

Material	Carbon
Coating	Ink
Cleaning	With alcohol and microfiber cloth

● uniVision incompatible

A calibration plate (SmartGrid) allows for easy and fast calibration in RobotVision applications. Calibration involves coordinate matching, eliminating the distortion caused by the optics. For precise calibration, the calibration plate should be completely in the camera's visual field and cover at least half of the visual field. Paper-printed calibration patterns result in inaccurate calibration. Opaque plates are suitable for incident light applications.

