

Datasheet

Suction cup OBF15x65P Polyurethane 60, T-slot

Item number: OBF15x65P.5X.T3W



Technical data

Description	Unit	Value
Suction cup shape	-	Bellows
Application	-	Oily sheet metal
Suction cup design	-	Oval
Characteristics	-	Oily sheet metal
Material	-	Polyurethane (PU)
Weight, min.	oz	0.67
Suction cup model	-	OBF
Volume	in ³	0.16
Height	in	0.92
Length	in	2.60
Fitting size	-	None
Fitting option	-	None
Fitting style	-	T-slot
Fitting type	-	None
Width	in	0.59
Length, actuated	in	2.62
Width, actuated	in	0.59
Fitting material	-	Al
Suction cup model	-	OBF15x65P Oily metal sheet
Movement, vertical max.	in	0.11
Curve radius, min.	in	0.79
Suction cup model	-	OBF15x65P Dry metal sheet
Movement, vertical max.	in	0.11
Curve radius, min.	in	0.79

Performance - Lifting forces


	Vertical (lb)	Parallel (lb)
OBF15x65P Oily metal sheet		
17.72 -inHg	6.97	1.57
26.58 -inHg	9.22	1.80
OBF15x65P Dry metal sheet		
17.72 -inHg	9.22	6.97
26.58 -inHg	11.69	7.87

Material	
Name	Polyurethane (PU60)
Color	Orange
Temperature, min. °F	50.0
Temperature max. °F	122.0
Hardness °Shore A	60

Material resistance

Alcohol	n/a
Concentrated acids	Fair
Ethanol	Fair
Hydrolysis	Fair
Methanol	Poor
Oil	Excellent
Oxidation	Poor
Gasoline	Fair
Wear resistance	Excellent
Weather and ozone	Excellent

Dimensional drawings

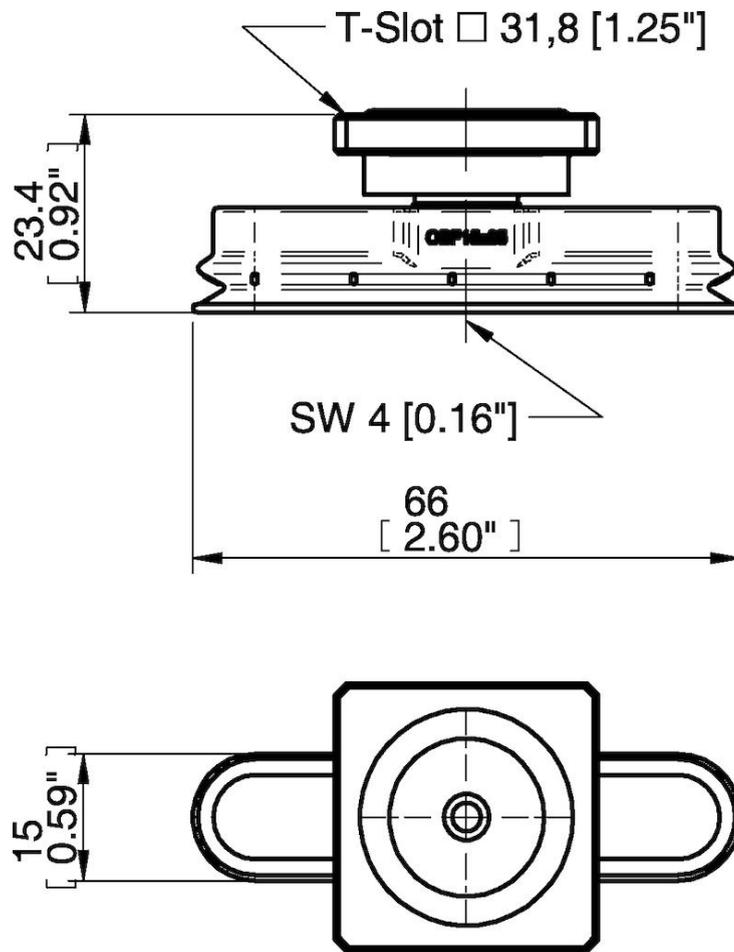

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.