

Low Angle Light

Red-cyan light, 80 mm

LMLX101

Part Number



- 4 sectors selectable
- Bicolor
- No external control required
- OverDrive
- Quick and easy replacement of accessories


The LMLX lights are a series of low angle lights. In this case, "low angle" means that the light enters with an angle of incidence of 45°. This light is therefore perfect for inspecting edges and scratches on all types of surfaces. The light can be operated in continuous mode or synchronized with the machine vision camera in strobe mode or strobe mode with increased intensity (OverDrive).

Technical Data

Optical Data	
Light Source	Red-cyan light
Wavelength	625...505 nm
Red light output	70 W/m ²
Cyan light output	46,2 W/m ²
Measuring point distance	20 mm
Environmental conditions	
Temperature Range	-10...40 °C
Storage temperature	-20...60 °C
Atmospheric humidity	< 80%, non-condensing
Electrical Data	
Supply Voltage	21,6...26,4 V DC
Power	9,12 W
Peak power	51,12 W
Current Consumption Continuous Mode (Ub = 24 V)	0,38 A
Current consumption flash mode OverDrive (operating voltage = 24 V)	2,13 A
Flash duration (max.)	2 ms
Duty cycle (max.)	< 0,1
Rise time	15 µs
Fall time	10 µs
Input signal	NPN
Input signal	PNP
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Dimming	0...10 V ± 100...30%
OverDrive	yes
Mechanical Data	
Housing Material	Aluminum, anodised
Housing Material	Plastic, ABS
Housing Material	Plastic, PMMA
Degree of Protection	IP65
UL Enclosure Type	1
Optic Cover	Plastic, PMMA
Connection	M12 × 1; 5-pin
Max. cable length	40 m
Camera aperture inner diameter	80 mm
Function	
Operating modes	Continuous, strobe overdrive
Connection Diagram No.	007
Suitable Mounting Technology No.	927

Complementary Products


ZC4G003 connection cable
ZDCG004 connection cable
ZDCG005 connection cable

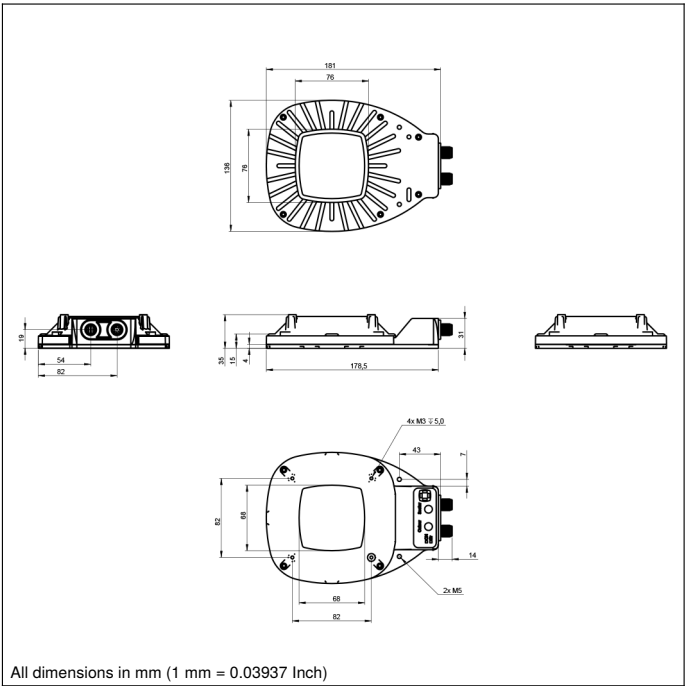


All dimensions in mm (1 mm = 0.03937 Inch)

Ctrl. Panel

T18



0c = sector selection indicator
68 = Power LED
7b = Color Selection Button
8b = Sector Selection Button
9b = Strobe Mode Indicator

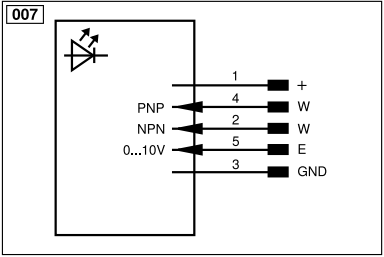

Legend					
+	Supply Voltage +	PT	Platinum measuring resistor	ENARs422	Encoder A/Ā (TTL)
-	Supply Voltage 0 V	nc	Not connected	ENBRs422	Encoder B/B̄ (TTL)
~	Supply Voltage (AC Voltage)	U	Test Input	ENa	Encoder A
A	Switching Output (NO)	Ū	Test Input inverted	ENb	Encoder B
Ā	Switching Output (NC)	W	Trigger Input	AMIN	Digital output MIN
V	Contamination/Error Output (NO)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
Ū	Contamination/Error Output (NC)	O	Analog Output	AOK	Digital output OK
E	Input (analog or digital)	O-	Ground for the Analog Output	SY In	Synchronization In
T	Teach Input	BZ	Block Discharge	SY OUT	Synchronization OUT
R	Reset input	Amv	Valve Output	OLT	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization		
RDY	Ready	E+	Receiver-Line	BK	Black
GND	Ground	S+	Emitter-Line	BN	Brown
CL	Clock	≡	Grounding	RD	Red
E/A	Output/Input programmable	SnR	Switching Distance Reduction	OG	Orange
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	YE	Yellow
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	GN	Green
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	BU	Blue
QSSD	Safety Output	La	Emitted Light disengageable	VT	Violet
Signal	Signal Output	Mag	Magnet activation	GY	Grey
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	WH	White
ENo RS422	Encoder 0-pulse 0/1 (TTL)	EDM	Contact Monitoring	PK	Pink
				GNYE	Green/Yellow