

High-Resolution Lens

for Smart Camera and Machine Vision Camera

ZVZG100

Part Number



Technical Data

Optical Data


Focal distance	6 mm
Maximum sensor size	1/1,7
Minimum pixel size	2,4 μm
Wavelength spectrum	Visible light

Mechanical Data

Lens thread	C-Mount
Housing Material	Aluminum, anodised
Housing Material	Plastic, PET
Housing Material	Plastic, PS
Optic Cover	Glass
Aperture	adjustable
Aperture	arrestable
Setting range aperture	F 2,4...16
Minimum object distance	100 mm
Filter Screw Size	M34 x 0,5 mm
Temperature Range	-20...60 °C
Packaging unit	1 Piece


- Adjustable aperture and focus
- Fixed focal length lens with C mount threaded connection
- For image chips with small pixel sizes
- Resistant to vibrations and shock

High-resolution, fixed focal length lenses with C mount threaded connection can be used, for example, on Machine Vision Cameras with C mount connection. They're especially well-suited for image chips with minimal pixel sizes. Adjustable aperture values and adjustable focus offer the greatest possible variability for perfect image recordings.

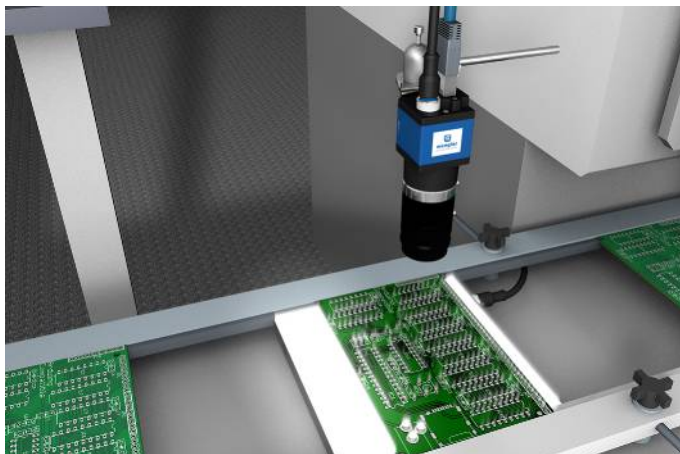

Complementary Products

Allen Key with Threaded Pins Z0070
Filter
ZBVG protective tube

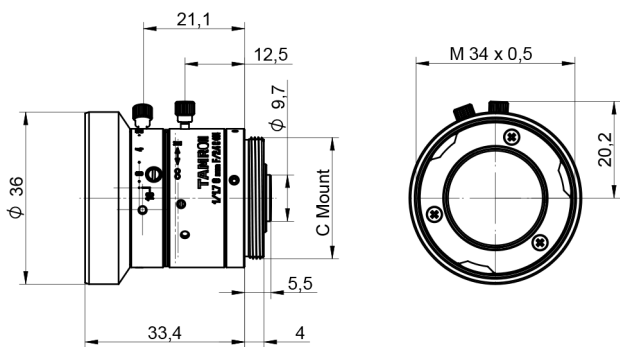

All dimensions in mm (1 mm = 0.03937 Inch)



Working Distance	200 mm	400 mm	600 mm
Visual Field	162 x 121 mm	328 x 246 mm	495 x 371 mm